Technical Specification

Engineered Wood Flooring

Sumo Collection

fuseflooring.com



Product

Collection	Sumo
Name	Generic
Style	Plank
Finish	High Solid Oil
Surface	Brushed

Construction

Туре	Engineered hardwood
Layers	3-layer
Edge	Bevel 2-sides
Connection	Tongue and groove
Dimensions	15 x 164 x 2200 mm*


Wood

Species	White Oak
Treatment	Light Smoked
Grade	Clear
Cut	Flatsawn
Hardness	1360 (Janka scale*)

Layers

Lamella Material	White Oak
Thickness	4 mm
Core Material	Spruce
Thickness	10 mm
Backing	Spruce Ply

Relative wood hardness

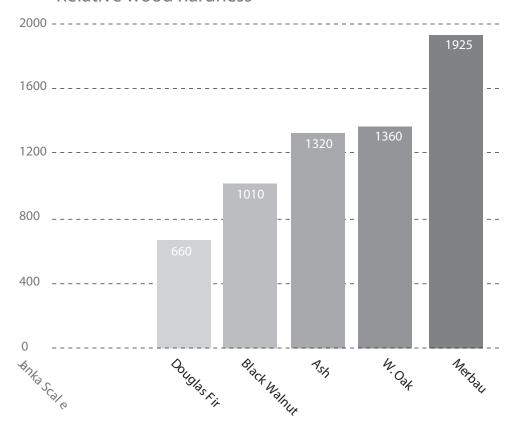



Wood colour variation

All wooden floors have natural colour variation. Untreated floors will have some colour variation, depending on the species. Stained floors generally have less colour variation. Smoked floors have more colour variation. Please be aware of the amount of variation to expect by looking at the 'wood - treatment' section, or contact a sales representative for pictures and futher information.

.....

Wood colour change

Wood changes colour when exposed to sunlight. This process is called 'oxidization' and happens over a period of several months to several years, depending on the species. Different species will change different colours over different periods of time. Note that certain finishes also oxidize and this colour change is in addition to the wood's oxidization.

.....

Wood hardness

The Jenka hardness scale is determined by the amount of force required to embed an 11 mm steel ball half-way into the wood. A higher rating is a harder wood. Note that this does not indicate a product's resistance to scratching, just denting.

Dimensions

The dimensions indicated are for the standard size. Many other dimensions are available for width, height and length, as well as mixed dimensions.

